

Misura Size	B	E	F	G	F1	CH	DN	PN Max BAR
1/4"	49	59	84	56	50	21	10	63
3/8"	49	59	84	56	50	21	12	63
1/2"	55	69	90	63	61	26	15	57
3/4"	66	78	125	76	72	32	20	57
1"	70	89	125	85	72	40	25	51
1,1/4"	93	104	145	106		50	32	40
1,1/2"	98	112	145	118		56	40	40
2"	110	133	170	133		68	50	40
2,1/2"	141	161	260	176		86	65	40



MATERIALS

BODY, SLEEVE: Brass CW617N-UNIEN12165
 STEM, PACKING NUT: Brass CW614N-UNIEN12164
 BALL: Brass CW617N-UNIEN12165 chrome-plated
 For 1/4"-3/8"-2,1/2" sizes the stem seal PTFE is replaced from 2 O-rings Nbr+Fkm and a seeger

SEALS, STEM SEALS: pure PTFE
 HANDLE: Aluminium EN-AB46100
 SCREW: Zincoated steel

TECHNICAL DATA

pressure / temperature

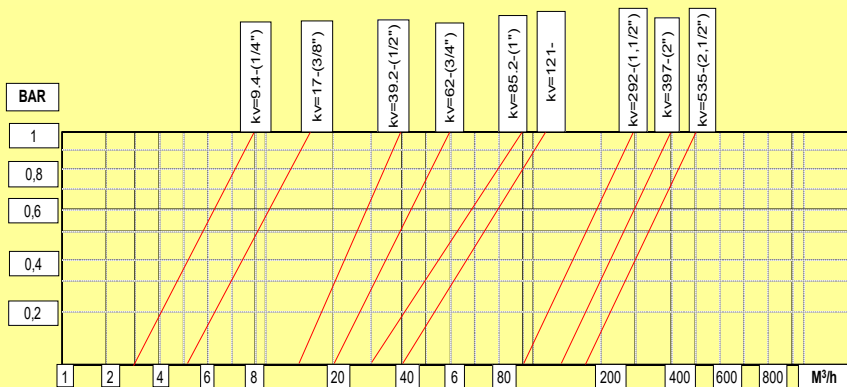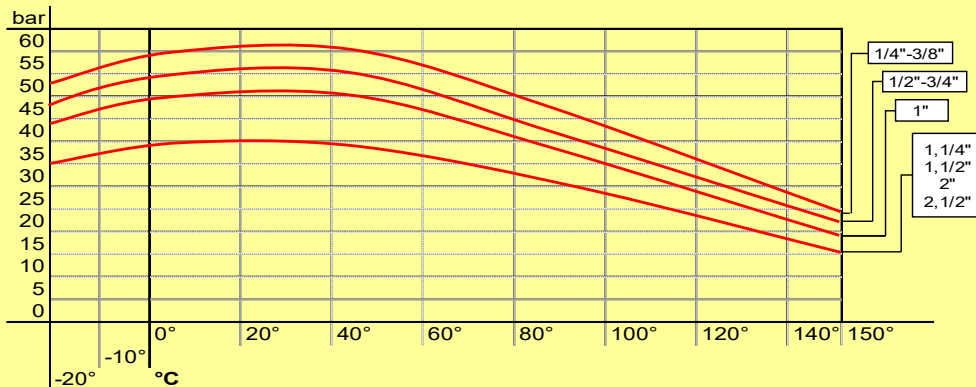

Threads: **UNI EN 10226-1 (ex ISO7/1)**
 For 2,1/2": **UNI ISO 228/1**
 Working temperature: **-10° +120°C**
 Valve conforming with directive **2014/68/EU**
FINAL TEST
 conforming with
UNI EN 12266-1 points A3 or A4
 For 1,1/2"-2"-2,1/2" sizes: conforming with directive **2014/68/EU**

INSTRUCTIONS: Valve opened: the handle is parallel to the body

Valve closed: the handle is perpendicular to the body

This valve must be employed according to this data sheet instructions. For 1,1/4" and superior sizes, it can't be used for dangerous fluid

in according to Directive 2014/68/EU art. 13.1 a)

ST-101-102 Rev. 05 05/17